
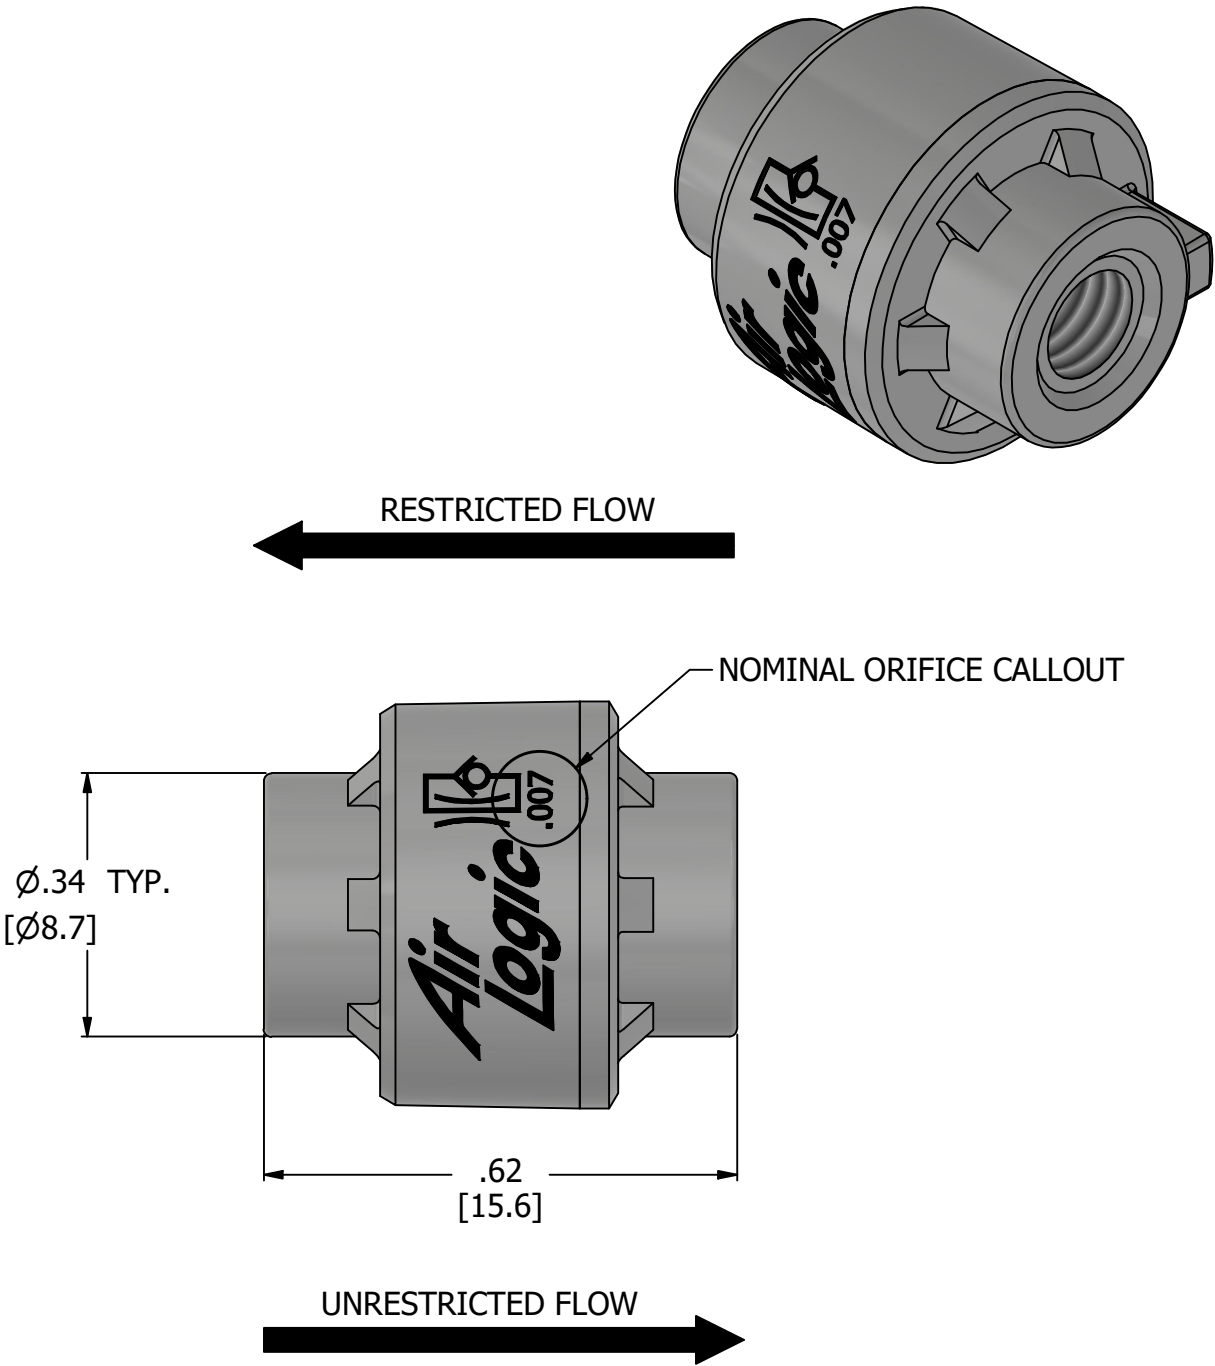


- NOTES:
- 1. ALL DIMENSIONS FOR REFERENCE ONLY
 - 2. REFER TO AIR LOGIC'S #10-32 INTERFACE & SEAL GUIDE
 - 3. REFER TO AIR LOGIC'S POLYSULFONE APPLICATIONS GUIDE
 - 4. GASES MUST BE CLEAN AND DRY

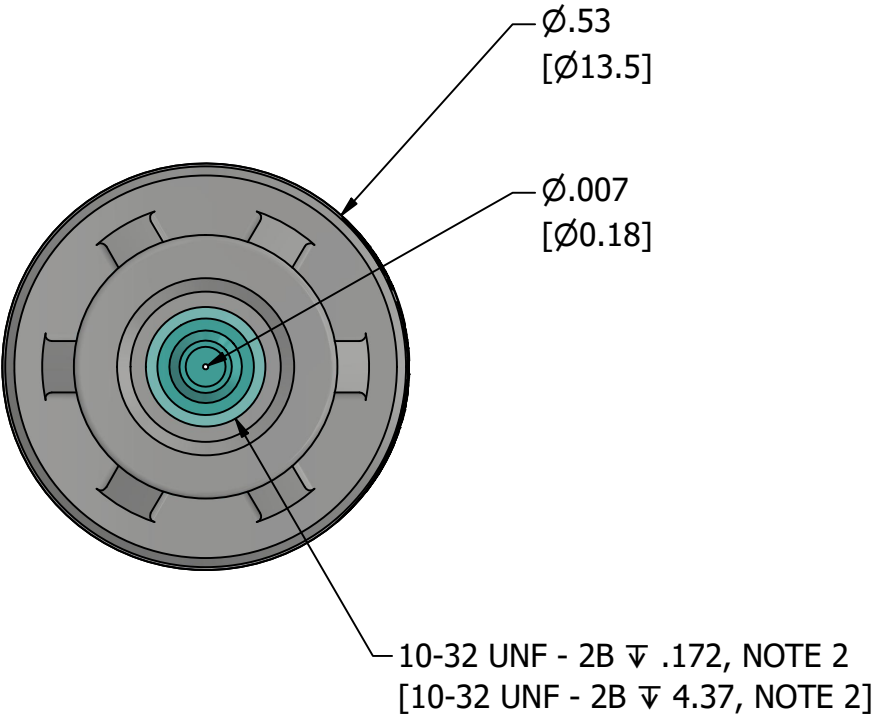

PRODUCT SPECIFICATIONS	
COLOR	GRAY, AQUA, BLACK
MEDIA	GASES, NOTE 3, NOTE 4
MAX INLET PRESSURE	75 PSI [5.2 BAR]
NOMINAL ORIFICE DIAMETER	$\varnothing.007$ [$\varnothing0.18$]
WETTED MATERIALS	POLYSULFONE, SILICONE
RECOMMENDED SYSTEM FILTRATION	5 MICRON

 **AIR-LOGIC** ® DIVISION OF KNAPP MFG, INC.
5102 DOUGLAS AVE RACINE, WI 53402
PHONE: (262) 639-9035 FAX: (262) 639-5996 WEB: AIR-LOGIC.COM

PART/DRAWING NO.:

F2804404071

DESCRIPTION:
DIRECTIONAL FLOW CONTROL, $\varnothing.007$, #10-32

REVISION: A	DRAWN: 2/17/2021
SCALE: 4 : 1	SHEET SIZE: B

TERMS OF USE:
THIS DRAWING IS FOR INFORMATIONAL PURPOSES ONLY. AIR LOGIC MAKES NO REPRESENTATIONS OF WARRANTIES CONCERNING SUITABILITY FOR ANY PARTICULAR PURPOSE. ALL PRODUCTS SUPPLIED ARE SUBJECT TO TERMS AND CONDITIONS FOUND AT AIR-LOGIC.COM

DRAWING TAKES PRECEDENCE OVER 3D MODEL GEOMETRY

TOLERANCE: DECIMALS .00 $\pm$.01, .000 $\pm$.005, FRACTIONS $\pm$ 1/64
ANGLES 1/4° UNLESS OTHERWISE SPECIFIED
UNITS: INCHES [MILLIMETERS]